



Submersible Sewage Pumps

Vortex Impeller

SERIES

U/UZ



Featuring a vortex impeller recessed in the widely opened pump casing interior, the U and UZ pumps can handle sewage with large solids without clogging or winding.

Cable Entry



Every cabtyre cable has an anti-wicking block at the cable entry section on the pump. This mechanism is such that a part of each conductor is stripped back and the part is sealed by molded rubber or epoxy potting which has flowed in between each strand of the conductor. This unique feature prevents wicking along the strand of the conductor itself.

Mechanical Seal

The mechanical seal with two seal faces containing silicon carbide (SiC) is equipped with the oil chamber. The advantages of the seal are two-fold, it eliminates spring failure caused by corrosion, abrasion or fouling which prevents the seal faces from closing properly, and prevents loss of cooling to the lower seal faces during run-dry conditions which causes the lower seal faces to fail.

Oil Lifter

The Oil Lifter was developed as a lubricating device for the mechanical seal. Utilizing the centrifugal force of the shaft seal, the Oil Lifter forcibly supplies lubricating oil to the mechanical seal and continues to supply the oil to the upper seal faces even if lubricant falls below the rated volume. This amazingly simple device is not only reliably lubricates and cools down, but also retains the stable shaft seal effect and extends the inspection term.

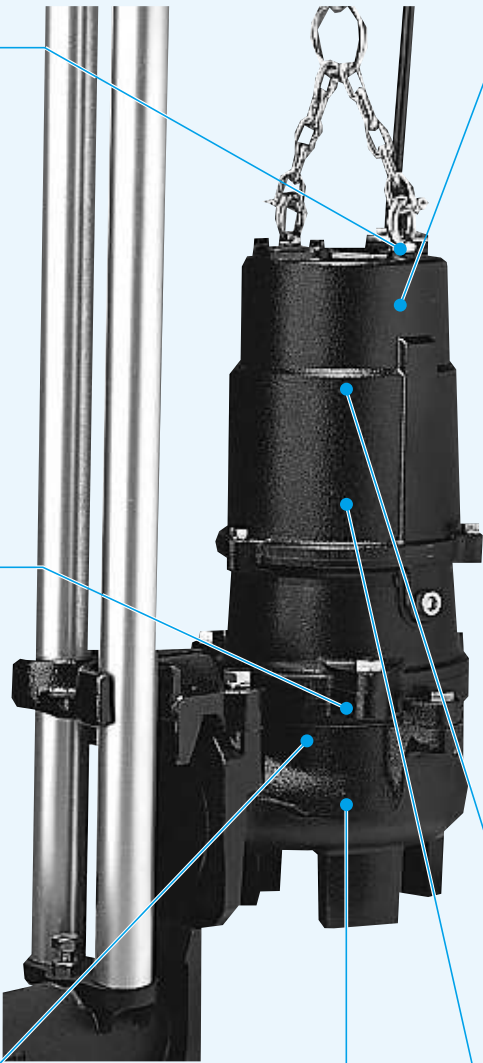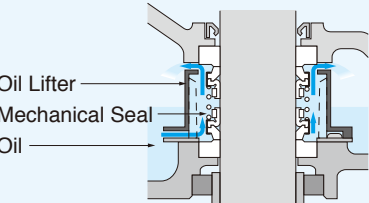

Motor Protector

Each pump up to 7.5kW as standard has a built in auto-cut, self-resetting Circle Thermal Protector (CTP). Integrated in the motor housing, the CTP directly cuts the motor circuit if excessive heat builds up or an overcurrent caused by an electrical or mechanical failure occurs.

A Miniature Thermal Protector (MTP) is embedded in each winding of the motor. These MTPs are connected in series, and their wires are led out of the motor. Should the winding temperature rise to the actuating temperature, the bimetal strip opens to cause the control panel to shut the power supply.

Motor

The motor is a dry-type, squirrel-cage induction motor, housed in a watertight casing, and conforms to insulation classes E or F. In each of these insulation classes, all standard pumps can be used in ambient temperatures up to 40°C.

Shaft

The high-tensile stainless steel shaft used on all pumps is designed to have adequate strength for the transmission of the full load. It is supported by C3 type, high-quality, deep-groove ball bearings.

Impeller

The impeller is a vortex type. The rotation of the impeller produces a whirling, centrifugal action between the impeller and pump casing. Being coupled with a wide pump casing, even large solids and fibrous matters can be pumped out without obstruction.



MODEL NUMBER DESIGNATION

| | | | | | |
|-------------------------------|--------------------|--|--|---------------------------------|------------------------------|
| 100 | UZ | A | 4 | 3.7 | S |
| Discharge bore in millimeters | Name of the series | Operation sub code | Phase | Rated motor output in kilowatts | Number of poles of the motor |
| | | None : None automatic operation A : Automatic operation W : Auto-alternation operation | None : Three-phase S : Single-phase | | |

(This model does not exist.)

GUIDE RAIL FITTING SYSTEM

The guide rail fitting system connects the pump to and from the piping easily just by lowering and hoisting the pump, allowing easy maintenance and inspection without the need to enter the sump.

Pump models used in combination with the guide rail fitting system can be identified by the prefix "TOS", "TS" and "TOK". Refer to standard specifications for availability and model numbers.

TOS

The TOS is the standard guide rail fitting system made of cast-iron and is compatible with cast-iron pumps. Pumps having discharge bore from 50mm to 100mm are available for the TOS.



TOK

Made of high-quality resin, the TOK is designed for light-weight, small pumps. Rubber bellow attached to the guide hook are inverted to the duckfoot bend when the pump starts operating. This eliminates leakage at the seal even if a light-weight pump is used in combination with the TOK.

The TOK can be used with the U series pumps of 0.25kW to 0.75kW with maximum discharge bore of 50mm.



AUTOMATIC MODEL

The automatic model has an integral control circuit and two float switches that operate at a low voltage. It operates automatically in response to the change in water levels. As it has a Circle Thermal Protector (CTP) integrated into the motor to protect the motor from overload or overheating, it is not required to provide an extra motor protection circuit in the starter panel.

This model can be identified by the suffix "A". Refer to the standard specifications for availability and model numbers.




AUTO-ALTERNATION MODEL

The auto-alternation model is used along with an automatic model. The combinational use of these two pumps enables each pump to operate alternately without control panel.

The auto-alternation model has three floats and can be identified by the suffix "W". Refer to standard specifications for availability and model numbers. It is available in the same output range of the automatic pumps.


How the Auto-alternation Model Works

● Operation is enabled by merely connecting the power supply.

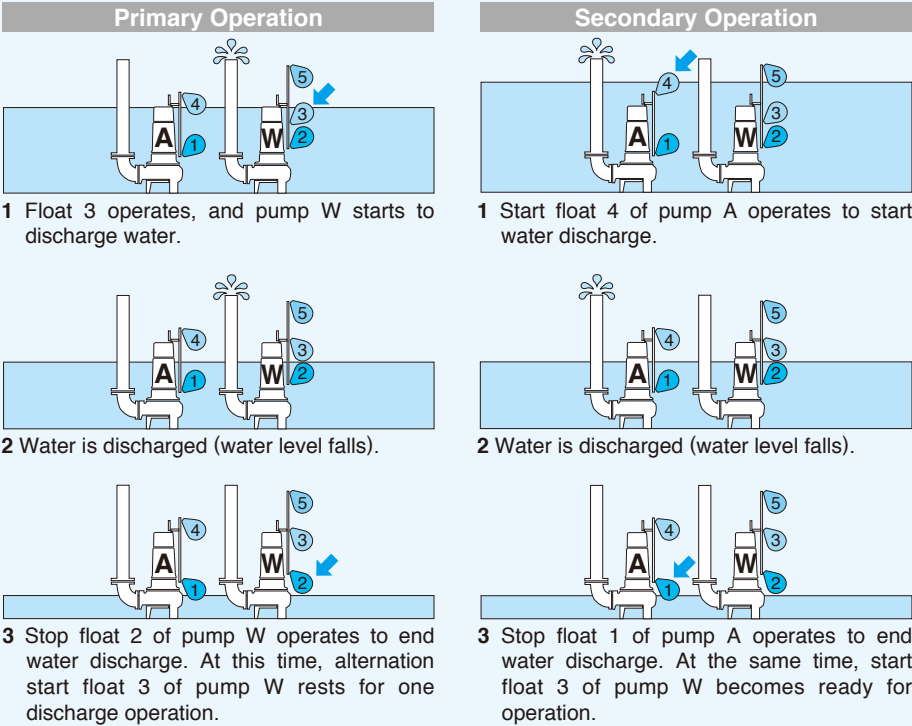


※Primary operation and secondary operation are repeated alternately.
※Both primary and secondary operations are performed simultaneously when water has risen to an abnormal level.


Performance Curves

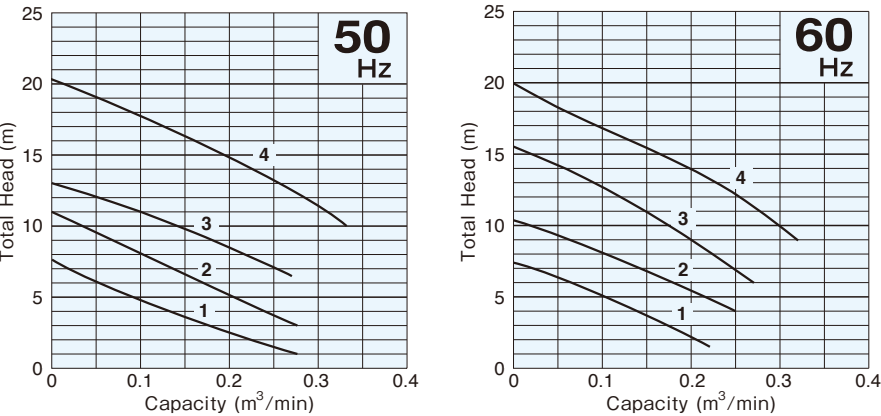


Dimensions

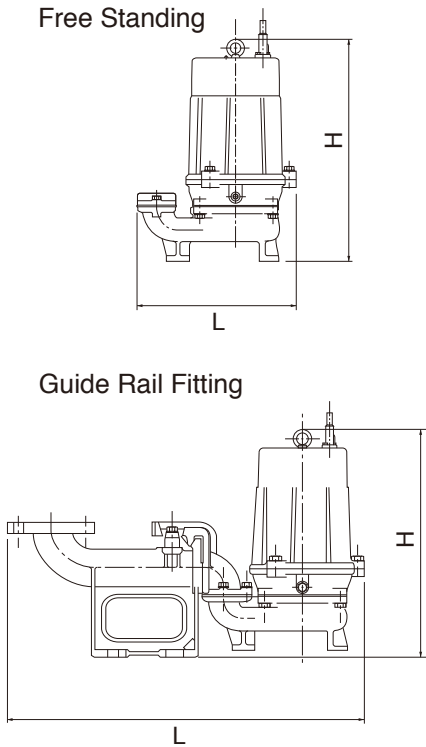

Performance Curves

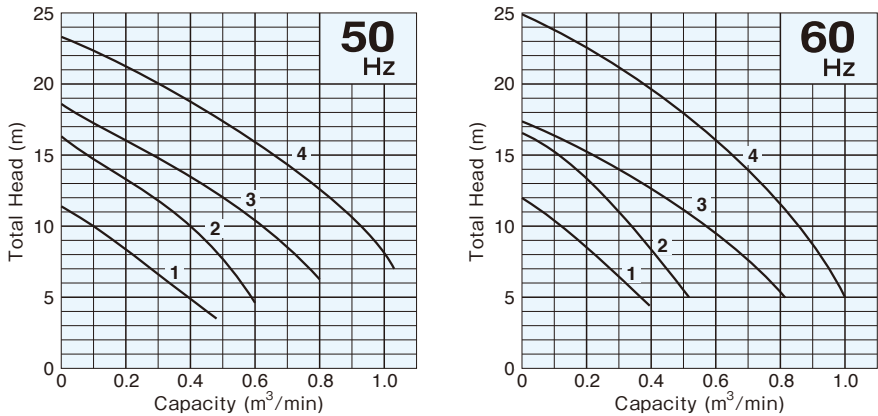

Dimensions

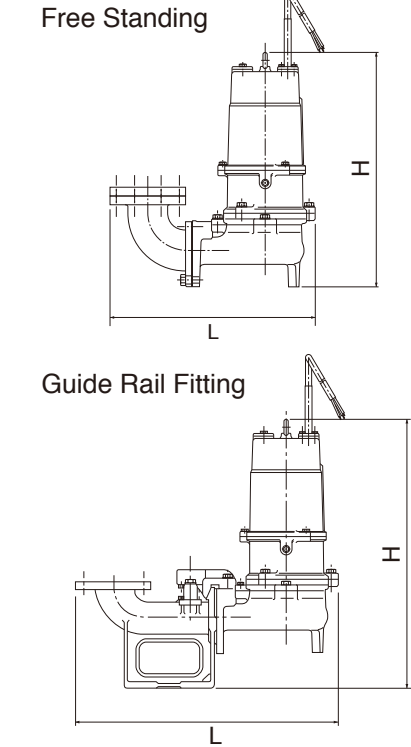

Model Selection 40 · 50mm

| Curve No. | Discharge Bore mm | Standard Model | | Automatic Model | | Auto-Alternation Model | | | Motor Output kW | Phase | Speed (S.S.) 50Hz/60Hz min ⁻¹ | Starting Method | Solids Passage mm | Cable Length m | Cable Code | Dimensions L×H mm | | | | Dry Weight * kg | | | |
|-----------|-------------------|----------------|--------------------|-------------------------------|--------------------|------------------------|--------------------|--|-----------------|--------|--|-----------------|-------------------|----------------|------------|-------------------------------|--------------------|---------------|--------------------|-----------------|--------------------|------|----|
| | | Standard Model | | Auto & Auto-Alternation Model | | Standard Model | | | | | | | | | | Auto & Auto-Alternation Model | | | | | | | |
| | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | | | | | | | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | |
| 1 | 40 | 40U2.25S | (TOK) | 40UA2.25S | (TOK) | 40UW2.25S | (TOK) | | 0.25 | Single | 3000/3600 | Split-phase | 35 | 5 | a | 241×383 | — | 241×433 | — | 14 | — | 15.5 | — |
| | 40 | 40U2.25 | (TOK) | 40UA2.25 | (TOK) | 40UW2.25 | (TOK) | | 0.25 | Three | 3000/3600 | D.O.L. | 35 | 6 | A | 241×383 | — | 241×433 | — | 13.5 | — | 15 | — |
| 2 | 50 | 50U2.4S | (TOK) | 50UA2.4S | (TOK) | 50UW2.4S | (TOK) | | 0.4 | Single | 3000/3600 | Capacitor | 35 | 5 | a | 236×433 | — | 236×450 | — | 20 | — | 21 | — |
| | 50 | 50U2.4 | (TOK) | 50UA2.4 | (TOK) | 50UW2.4 | (TOK) | | 0.4 | Three | 3000/3600 | D.O.L. | 35 | 6 | A | 236×400 | — | 236×450 | — | 19.2 | — | 21 | — |
| 3 | 50 | 50U2.75 | (TOK) | 50UA2.75 | (TOK) | 50UW2.75 | (TOK) | | 0.75 | Three | 3000/3600 | D.O.L. | 35 | 6 | A | 249×395 | — | 310×476 | — | 23 | — | 24 | — |
| 4 | 50 | 50U21.5 | TOS50U21.5 | 50UA21.5 | TOS50UA21.5 | 50UW21.5 | TOS50UW21.5 | | 1.5 | Three | 3000/3600 | D.O.L. | 35 | 6 | A | 297×466 | 658×478 | 347×560 | 708×572 | 30 | 35 | 31 | 36 |


* All weights excluding cable
Weights of guide rail fitting model excluding duckfoot bend

Model Selection 80mm


| Curve No. | Discharge Bore mm | Standard Model | | Automatic Model | | Auto-Alternation Model | | | Motor Output kW | Phase | Speed (S.S.) 50Hz/60Hz min ⁻¹ | Starting Method | Solids Passage mm | Cable Length m | Cable Code | Dimensions L×H mm | | | | Dry Weight *2 kg | | | |
|-----------|-------------------|----------------|--------------------|-------------------------------|--------------------|------------------------|--------------------|--|-----------------|-------|--|-----------------|-------------------|----------------|------------|-------------------------------|--------------------|---------------|--------------------|------------------|--------------------|----|----|
| | | Standard Model | | Auto & Auto-Alternation Model | | Standard Model | | | | | | | | | | Auto & Auto-Alternation Model | | | | | | | |
| | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | | | | | | | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | |
| 1 | 80 | 80U2.75 | TOS80U2.75 | 80UA2.75 | TOS80UA2.75 | 80UW2.75 | TOS80UW2.75 | | 0.75 | Three | 3000/3600 | D.O.L. | 46 | 6 | A | 383×421 | 605×531 | 444×502 | 666×612 | 29 | 24 | 30 | 26 |
| 2 | 80 | 80U21.5 | TOS80U21.5 | 80UA21.5 | TOS80UA21.5 | 80UW21.5 | TOS80UW21.5 | | 1.5 | Three | 3000/3600 | D.O.L. | 46 | 6 | A | 420×499 | 642×609 | 469×593 | 691×703 | 40 | 36 | 41 | 37 |
| 3 | 80 | 80U22.2 | TOS80U22.2 | 80UA22.2 | TOS80UA22.2 | 80UW22.2 | TOS80UW22.2 | | 2.2 | Three | 3000/3600 | D.O.L. | 56 | 6 | A(B*1) | 502×562 | 641×647 | 502×656 | 641×741 | 55 | 51 | 63 | 59 |
| 4 | 80 | 80U23.7 | TOS80U23.7 | 80UA23.7 | TOS80UA23.7 | 80UW23.7 | TOS80UW23.7 | | 3.7 | Three | 3000/3600 | D.O.L. | 56 | 6 | B(C*1) | 502×565 | 641×650 | 502×629 | 641×714 | 62 | 58 | 73 | 69 |

*1 200~240V
*2 All weights excluding cable
Weights of guide rail fitting model excluding duckfoot bend


Performance Curves

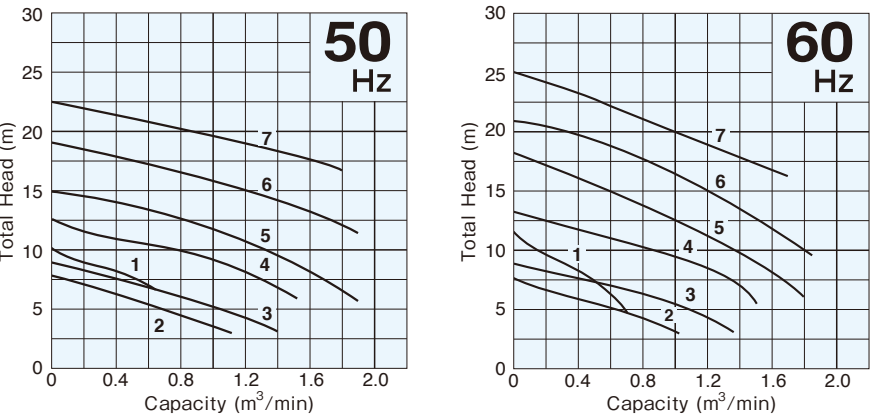


Dimensions

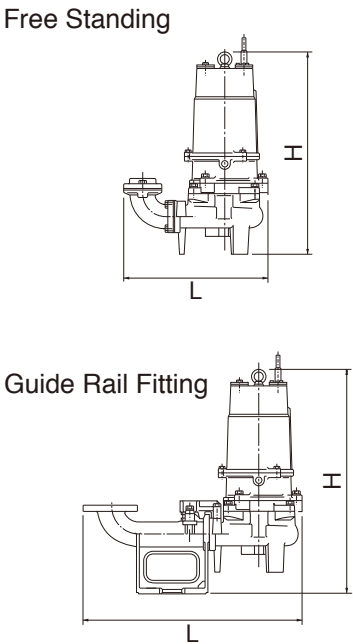

Performance Curves

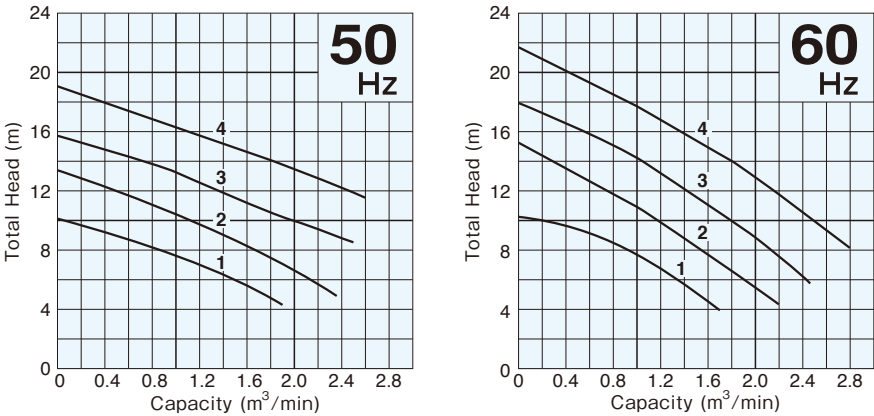

Dimensions

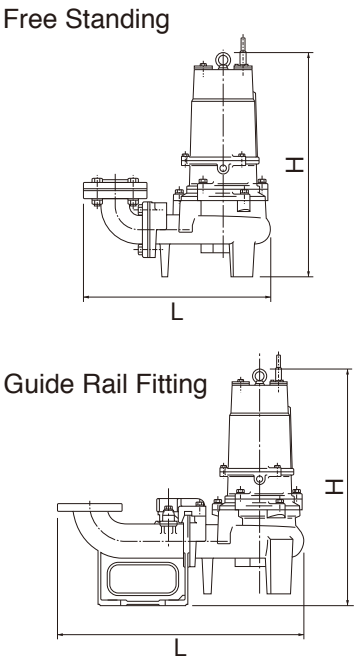

Model Selection 50 · 80mm

| Curve No. | Discharge Bore mm | Standard Model | | Automatic Model | | Auto-Alternation Model | | | Motor Output kW | Phase | Speed (S.S.) 50Hz/60Hz min ⁻¹ | Starting Method | Solids Passage mm | Cable Length m | Cable Code | Dimensions L×H mm | | | | Dry Weight ^{*2} kg | | | |
|-----------|-------------------|----------------|--------------------|-----------------|--------------------|------------------------|--------------------|--|-----------------|-------|--|-----------------|-------------------|----------------|---------------------|-------------------|--------------------|-----------------------------|--------------------|-----------------------------|--------------------|-----------------------------|----|
| | | | | | | | | | | | | | | | | Standard Model | | Auto&Auto-Alternation Model | | Standard Model | | Auto&Auto-Alternation Model | |
| | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | | | | | | | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | |
| 1 | 50 | 50UZ41.5 | TOS50UZ41.5 | 50UZA41.5 | TOS50UZA41.5 | 50UZW41.5 | TOS50UZW41.5 | | 1.5 | Three | 1500/1800 | D.O.L. | 50 | 6 | A | 405×566 | 621×626 | 442×683 | 658×743 | 52 | 50 | 58 | 56 |
| 2 | 80 | 80UZ41.5 | TOS80UZ41.5 | 80UZA41.5 | TOS80UZA41.5 | 80UZW41.5 | TOS80UZW41.5 | | 1.5 | Three | 1500/1800 | D.O.L. | 80 | 6 | A | 531×637 | 705×670 | 565×754 | 738×787 | 66 | 56 | 73 | 63 |
| 3 | 80 | 80UZ42.2 | TOS80UZ42.2 | 80UZA42.2 | TOS80UZA42.2 | 80UZW42.2 | TOS80UZW42.2 | | 2.2 | Three | 1500/1800 | D.O.L. | 80 | 6 | A(B ^{*1}) | 531×637 | 705×670 | 565×754 | 738×787 | 66 | 57 | 73 | 64 |
| 4 | 80 | 80UZ43.7 | TOS80UZ43.7 | 80UZA43.7 | TOS80UZA43.7 | 80UZW43.7 | TOS80UZW43.7 | | 3.7 | Three | 1500/1800 | D.O.L. | 80 | 6 | B(C ^{*1}) | 557×688 | 731×721 | 565×861 | 738×894 | 72 | 63 | 79 | 70 |
| 5 | 80 | 80UZ45.5 | TOS80UZ45.5 | — | — | — | — | | 5.5 | Three | 1500/1800 | D.O.L. | 80 | 8 | D | 595×899 | 768×927 | — | — | 122 | 118 | — | — |
| 6 | 80 | 80UZ47.5 | TOS80UZ47.5 | — | — | — | — | | 7.5 | Three | 1500/1800 | D.O.L. | 80 | 8 | E | 595×920 | 768×948 | — | — | 137 | 127 | — | — |
| 7 | 80 | 80UZ411 | TOS80UZ411 | — | — | — | — | | 11 | Three | 1500/1800 | Star-Delta | 80 | 8 | F | 602×981 | 776×1007 | — | — | 173 | 171 | — | — |

^{*1} 200~240V
^{*2} All weights excluding cable
Weights of guide rail fitting model excluding duckfoot bend

Model Selection 100mm

| Curve No. | Discharge Bore mm | Standard Model | | Automatic Model | | Auto-Alternation Model | | | Motor Output kW | Phase | Speed (S.S.) 50Hz/60Hz min ⁻¹ | Starting Method | Solids Passage mm | Cable Length m | Cable Code | Dimensions L×H mm | | | | Dry Weight ^{*2} kg | | | |
|-----------|-------------------|----------------|--------------------|-----------------------------|--------------------|------------------------|--------------------|--|-----------------|-------|--|-----------------|-------------------|----------------|---------------------|-----------------------------|--------------------|---------------|--------------------|-----------------------------|-----|----|----|
| | | Standard Model | | Auto&Auto-Alternation Model | | Standard Model | | | | | | | | | | Auto&Auto-Alternation Model | | | | | | | |
| | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | | | | | | | | Free Standing | Guide Rail Fitting | Free Standing | Guide Rail Fitting | | | | |
| 1 | 100 | 100UZ43.7 | TOS100UZ43.7 | 100UZA43.7 | TOS100UZA43.7 | 100UZW43.7 | TOS100UZW43.7 | | 3.7 | Three | 1500/1800 | D.O.L. | 100 | 6 | B(C ^{*1}) | 627×737 | 846×777 | 632×910 | 851×950 | 79 | 70 | 86 | 77 |
| 2 | 100 | 100UZ45.5 | TOS100UZ45.5 | — | — | — | — | | 5.5 | Three | 1500/1800 | D.O.L. | 100 | 8 | D | 652×939 | 871×974 | — | — | 138 | 127 | — | — |
| 3 | 100 | 100UZ47.5 | TOS100UZ47.5 | — | — | — | — | | 7.5 | Three | 1500/1800 | D.O.L. | 100 | 8 | E | 652×960 | 871×995 | — | — | 144 | 133 | — | — |
| 4 | 100 | 100UZ411 | TOS100UZ411 | — | — | — | — | | 11 | Three | 1500/1800 | Star-Delta | 100 | 8 | F | 660×1021 | 879×1054 | — | — | 186 | 175 | — | — |

^{*1} 200~240V
^{*2} All weights excluding cable
Weights of guide rail fitting model excluding duckfoot bend

CABTYRE CABLE CODE REFERENCE

Single-Phase

| Code | No. of Cables | Cores×mm ² | Outer Dia. mm | Material |
|------|---------------|-----------------------|---------------|----------|
| a | 1 | 3×1.25 | 10.1 | PVC |

Three-Phase

| Code | No. of Cables | Cores×mm ² | Outer Dia. mm | Material |
|------|---------------|-----------------------|---------------|----------|
| A | 1 | 4×1.25 | 11.1 | PVC |
| B | 1 | 4×2.0 | 11.8 | |
| C | 1 | 4×3.5 | 13.9 | |

| Code | No. of Cables | Cores×mm ² | Outer Dia. mm | Material |
|------|---------------|-----------------------|---------------|--------------------|
| D | 1 | 4×3.5 | 14.1 | Chloroprene Rubber |
| E | 1 | 4×5.5 | 16.8 | |
| F | 3 | 4×3.5 | 14.1 | Chloroprene Rubber |
| | | 3×3.5 | 12.9 | Rubber |
| | | 2×1.25 | 9.6 | PVC |

TSURUMI OPTIONS

SPECIAL VERSION WITH GALVANIC CORROSION PROTECTION

In seawater, a material's resistance to corrosion can be seen clearly. When metals with different potentials are brought into contact in seawater, only the metal of lower potential corrodes. As the difference in potential increases, the metal of lower potential corrodes faster. As an option, Tsurumi can supply pumps with parts made of higher electric potential metal as the sacrificial anode.

SPECIAL VERSION FOR HIGHER TEMPERATURE LIQUID

Standard pumps are designed for continuous running at the maximum ambient temperature of 40°C. In addition to these, Tsurumi can provide pumps for operation at higher liquid temperatures upon request. Refitting for operation at higher temperatures involves modification of not only the insulation of motor windings but also several components.

Two high-temperature operating models are available - the Rank 60 for operation in liquids up to 60°C and the Rank 90 for operation in liquids up to 90°C. Consult your dealer for more details. (These special versions are not available for some pump models.)

DRY PIT VERSION

The advantage of dry pit model is that it will not be damaged by flooding, as it is constructed with a submersible pump. Tsurumi can provide the dry pit model as option for the whole range of U/UZ-series pumps. The water jacket covers whole part of the motor. It efficiently cools the motor for continuous operations.

SPECIAL VERSION WITH NON-STANDARD MATERIALS

Tsurumi can also provide you with pumps with essential components such as the impeller, pump casing and the suction cover made of non-standard materials. Select from stainless steel, chromium iron and bronze to suit your specific requirements. Consult your dealer for more details.

SPECIAL ACCESSORIES

FLOAT SWITCHES

Tsurumi offers two types of float switches (liquid level sensors). A micro-switch is incorporated in both types.

Model MC-2 is a heavy-duty type float switch with a shock absorber. Having equipped with a high grade micro switch, the MC-2 assures trouble-free operation in the liquid containing much suspended solids and floating scum. Either of the two contacts, normally-open or normally-close, can be selected as required.



Model RF-5 is an economy type float which can detect upper/lower limit water levels with single float. The snap on-off action ensures stable operation in clean or waste water containing suspended solids or oil and fat.



Product images and specifications may differ from actual products due to improvements. The OO series and model OO are indicated with our series/model codes in this catalog.

TSURUMI
MANUFACTURING CO., LTD.

www.tsurumi-global.com



Your Dealer